



Optec New 120V – The durable universal talent

A spotlight for all situations, consistently designed for sustainability

Durable and adaptable at the same time: the new generation of our top-selling Optec combines these characteristics to achieve maximum sustainability. Optec New is designed for a service life of at least 20 years. The proven, high-efficiency lighting technology for more lux per watt on the target surface is supplemented by a design aimed at durability thanks to high quality components. Thanks to upgrades and updates, Optec also remains adaptable to new

usage scenarios. As with its predecessors, Optec New meets all quality of light needs in shops, galleries, and museums, especially on existing track installations. The system of interchangeable optics and suitable accessories provides limitless flexibility of use, now and well into the future.

Optec New 120V for 2-circuit track



Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

1 ERCO lenses

- Made of optical polymer
- Spherolit lenses: narrow spot, spot, flood, wide flood, extra wide flood, oval flood or wallwash
- Zoom lenses: zoom spot; continuously focusable
- Projection lenses: narrow framing or wide framing; continuously focusable

2 Lens unit

- Rotatable through 360°
- Polymer, white or black
- Contour spotlights with framing attachment

3 ERCO LED module

- High-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)
- Collimating lens made of optical polymer

4 Cylindrical light head

- White (RAL9002) or black
- Cast aluminum, powder-coated
- 270° tilt

5 Housing

- White (RAL9002) or black
- Polymer
- Rotatable through 360° on adapter

6 Control gear

- On-board Dim or Casambi Bluetooth
- On-board Dim version: rotary control for control of brightness on the luminaire

7 ERCO turning adapter for 2-circuit track

Variants on request

- Housing: 10,000 further colors
- Please contact your ERCO consultant.




Design and application:
www.erco.com/optec-new

Optec New 120V for 2-circuit track



Particularly durable

Optec New 120V has been designed and tested for a life cycle of about 75,000 hours. This corresponds to a service life of 20 years, presuming standard product use, compliance with maintenance intervals and a period of illumination of about ten hours per day.



More light on the target surface

The lens system, developed and manufactured in-house, precisely projects the light with no spill light. The accent lighting of the ERCO spotlight thus sets itself clearly apart from conventional spotlights.



Very good price performance ratio

Optec New 120V as an entry-level product offers you an attractive price-performance ratio. This is particularly interesting for lighting design tasks with economic efficiency in mind.


Special characteristics

	Very high durability	ERCO high-power LEDs	Excellent thermal management	On-board Dim
	Very high durability	Efficient Spherolit technology	EMC-optimized	Casambi Bluetooth
	High-efficiency lighting technology	Different light distributions	Various housing colors	
	Very good price performance ratio	Oval flood, freely rotatable	Various construction sizes	
		Different light colors	Pivotable through 270°	
			Accessory for maximum visual comfort	

Optec New 120V for 2-circuit track – Luminaire arrangement

Spotlights

Narrow spot, Spot, Flood

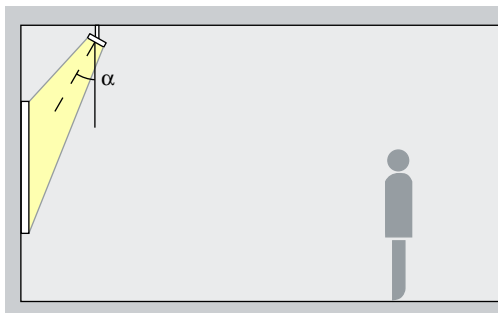


Optec spotlights accentuate artwork, products and architectural details effectively. The ideal angle of tilt (α) for this is around 30° . The object is modelled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.

Arrangement: $\alpha = 30^\circ$

Zoom spotlights

Zoom spot

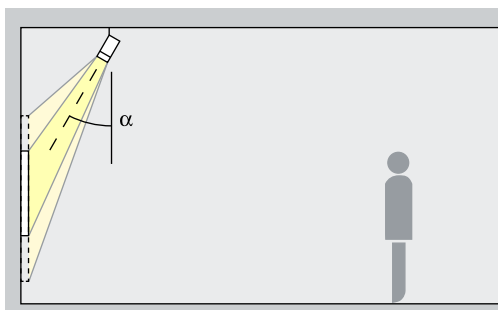


Zoom spotlights feature a continuously adjustable beam angle. With the spot to wide flood zoom range, smaller works of art can be accentuated effectively at an inclination angle (α) of approximately 30° . The object is modeled without distorting the effect as a result of excessive shadowing. It also prevents shadows cast by the observer.


Arrangement: $\alpha = 30^\circ$

Contour spotlights

Narrow framing, Wide framing

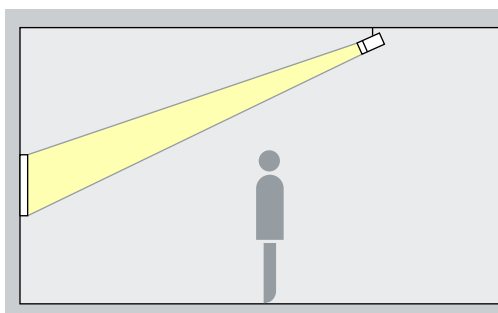


Contour spotlights generate freely adjustable, crisp-edged light beams. As a result fascinating effects can be created where pictures appear to illuminate from within. Select narrow framing to accurately illuminate small exhibits from a long distance and wide framing to accurately illuminate large exhibits from a short distance.

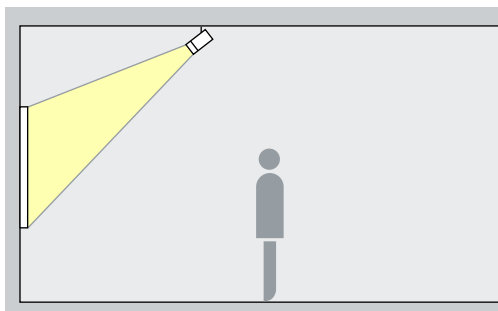

Floodlights

Wide flood, Extra wide flood, Oval flood

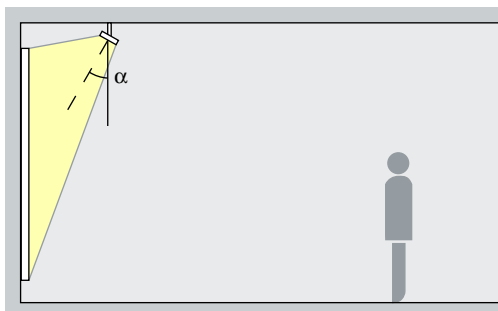


The ideal angle of tilt (α) for flood-lighting objects with a long, square shape, e.g. pictures, sculptures or merchandise displays, is around 30° .

Arrangement: $\alpha = 30^\circ$


Optec New 120V for 2-circuit track – Luminaire arrangement

Lens wallwashers Wallwash

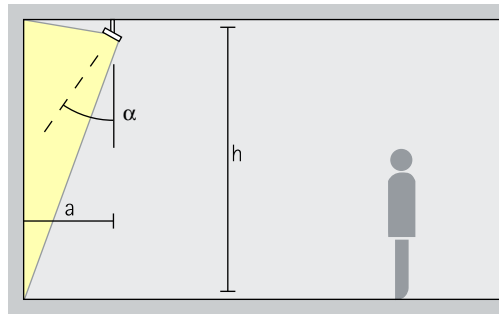

For uniform vertical illuminance, the distance (a) of Optec lens wallwashers from the wall should be around one third of the room height (h). This results in an angle of tilt (α) of approx. 35°.

Arrangement: $a = 1/3 \times h$ or
 $\alpha = 35^\circ$


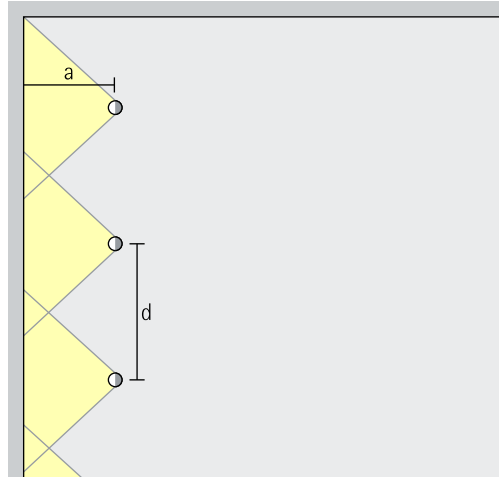


For good longitudinal uniformity, the luminaire spacing (d) of Optec wallwashers may be up to 1.5 times the distance to the wall (a).


Arrangement: $d \leq 1.5 \times a$

Optimal wall distances and luminaire spacing values for individual products are specified in the wall-washer tables at www.erco.com.

Optec New 120V for 2-circuit track

Size	 S Ø 2 3/8"		 M Ø 3 5/8"																																					
LED module Maximum value at 4000K CRI 92	9.9W/1350lm		3.1W/339lm (Narrow spot)																																					
Light Color	<table><tr><td></td><td>2700K CRI 92</td><td></td><td>3500K CRI 92</td></tr><tr><td></td><td>3000K CRI 92</td><td></td><td>4000K CRI 92</td></tr><tr><td></td><td>3000K CRI 97</td><td></td><td></td></tr></table>			2700K CRI 92		3500K CRI 92		3000K CRI 92		4000K CRI 92		3000K CRI 97			<table><tr><td></td><td>2700K CRI 92</td><td></td><td>3500K CRI 92</td></tr><tr><td></td><td>3000K CRI 92</td><td></td><td>4000K CRI 92</td></tr><tr><td></td><td>3000K CRI 97</td><td></td><td></td></tr></table>			2700K CRI 92		3500K CRI 92		3000K CRI 92		4000K CRI 92		3000K CRI 97														
	2700K CRI 92		3500K CRI 92																																					
	3000K CRI 92		4000K CRI 92																																					
	3000K CRI 97																																							
	2700K CRI 92		3500K CRI 92																																					
	3000K CRI 92		4000K CRI 92																																					
	3000K CRI 97																																							
Light distribution	<table><tr><th>Spotlights</th><th>Floodlights</th></tr><tr><td> Narrow spot</td><td> Wide flood</td></tr><tr><td> Spot</td><td> Extra wide flood</td></tr><tr><td> Flood</td><td> Oval flood</td></tr><tr><td>Zoom spotlights</td><td>Lens wallwashers</td></tr><tr><td> Zoom spot</td><td> Wallwash</td></tr><tr><td>Contour spotlights</td><td></td></tr><tr><td> Narrow framing</td><td></td></tr><tr><td> Wide framing</td><td></td></tr></table>		Spotlights	Floodlights	 Narrow spot	 Wide flood	 Spot	 Extra wide flood	 Flood	 Oval flood	Zoom spotlights	Lens wallwashers	 Zoom spot	 Wallwash	Contour spotlights		 Narrow framing		 Wide framing		<table><tr><th>Spotlights</th><th>Floodlights</th></tr><tr><td> Narrow spot</td><td> Wide flood</td></tr><tr><td> Spot</td><td> Extra wide flood</td></tr><tr><td> Flood</td><td> Oval flood</td></tr><tr><td>Zoom spotlights</td><td>Lens wallwashers</td></tr><tr><td> Zoom spot</td><td> Wallwash</td></tr><tr><td>Contour spotlights</td><td></td></tr><tr><td> Narrow framing</td><td></td></tr><tr><td> Wide framing</td><td></td></tr></table>		Spotlights	Floodlights	 Narrow spot	 Wide flood	 Spot	 Extra wide flood	 Flood	 Oval flood	Zoom spotlights	Lens wallwashers	 Zoom spot	 Wallwash	Contour spotlights		 Narrow framing		 Wide framing	
Spotlights	Floodlights																																							
 Narrow spot	 Wide flood																																							
 Spot	 Extra wide flood																																							
 Flood	 Oval flood																																							
Zoom spotlights	Lens wallwashers																																							
 Zoom spot	 Wallwash																																							
Contour spotlights																																								
 Narrow framing																																								
 Wide framing																																								
Spotlights	Floodlights																																							
 Narrow spot	 Wide flood																																							
 Spot	 Extra wide flood																																							
 Flood	 Oval flood																																							
Zoom spotlights	Lens wallwashers																																							
 Zoom spot	 Wallwash																																							
Contour spotlights																																								
 Narrow framing																																								
 Wide framing																																								
Control	<table><tr><td></td><td>On-board Dim</td></tr><tr><td></td><td>Casambi Bluetooth + 0-10V via Bridge</td></tr></table>			On-board Dim		Casambi Bluetooth + 0-10V via Bridge	<table><tr><td></td><td>On-board Dim</td></tr><tr><td></td><td>Casambi Bluetooth + 0-10V via Bridge</td></tr></table>			On-board Dim		Casambi Bluetooth + 0-10V via Bridge																												
	On-board Dim																																							
	Casambi Bluetooth + 0-10V via Bridge																																							
	On-board Dim																																							
	Casambi Bluetooth + 0-10V via Bridge																																							
Color (housing)	<table><tr><td></td><td>White</td><td></td><td>10,000 colors *</td></tr><tr><td></td><td>Black</td><td></td><td></td></tr></table>			White		10,000 colors *		Black			<table><tr><td></td><td>White</td><td></td><td>10,000 colors *</td></tr><tr><td></td><td>Black</td><td></td><td></td></tr></table>			White		10,000 colors *		Black																						
	White		10,000 colors *																																					
	Black																																							
	White		10,000 colors *																																					
	Black																																							

	Lens Units		Honeycomb louvre		Barn doors
	Lenses		Snoot		Bridges/Gateways * 0-10V, DALI, DMX



L
 Ø 5 1/8"

34.8W/4868m	9.3W/1213lm (Narrow spot)
-------------	---------------------------

	2700K CRI 92		3500K CRI 92
	3000K CRI 92		4000K CRI 92
	3000K CRI 97		

Spotlights	Floodlights
Narrow spot	Wide flood
Spot	Extra wide flood
Flood	Oval flood
Zoom spotlights	Lens wallwashers
Zoom spot	Wallwash
Contour spotlights	
Narrow framing	
Wide framing	

	On-board Dim
	Casambi Bluetooth + 0-10V via Bridge

	White		10,000 colors *
	Black		

* available on request

