



## Pantrac – Lighting effects for walls


### **Simple and efficient wallwashing for museums and business premises.**

Pantrac exceeds the demands of the ultimate challenge in lighting design: perfect wallwashing. The system is designed to achieve superb uniform illumination of walls, product shelving or exhibits with total visual comfort. Innovative photometrics optimize its efficiency and, as a result, reduce the number of luminaires required, as these can be spaced further apart.

With its archetypal cubic design, the luminaire integrates as effort-

lessly with modern rooms as with historic architecture. A very wide dimming control range of 1% to 100% supports aesthetic and conservation aspects of artwork protection and gallery appearance.

## Pantrac for 2-circuit track

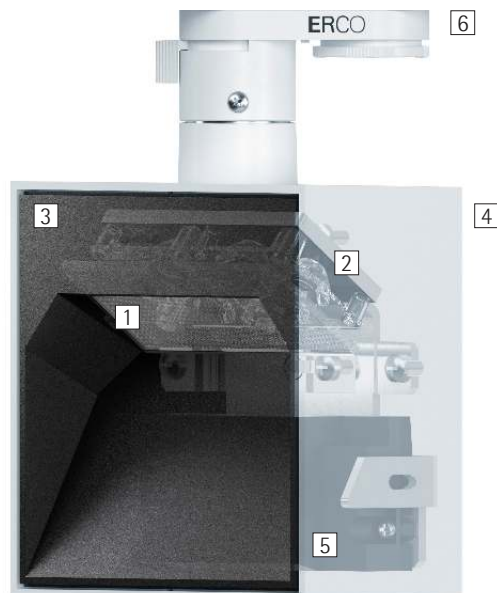

### Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

#### 1 ERCO Spherolit lens

- Light distribution: wallwash

#### 2 ERCO LED-module

- High-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)
- Collimating lens made of optical polymer

#### 3 Front cover

- Polymer, black lacquered

#### 4 Housing

- White (RAL9002) or black
- Cast aluminum, powder-coated
- Rotatable through 360° on adapter

#### 5 Control gear

- Trailing edge dimmable+On-board Dim
- Dimming with external dimmers (trailing edge) possible and rotary control for brightness control on the luminaire

#### 6 ERCO turning adapter for 2-circuit track

#### Variants on request

- Housing: 10,000 further colors
- Please contact your ERCO consultant.



Design and application:  
[www.erco.com/pantrac](http://www.erco.com/pantrac)


## Pantrac for 2-circuit track



**Outstanding uniformity**  
Pantrac provides uniform vertical lighting to perfection - whether in prestigious entrance areas, in offices or in museums.



**Simple installation**  
Pantrac creates perfect light for wallwashing without additional pivoting.



**Large luminaire spacing**  
The high-efficiency Pantrac lighting technology enables luminaire spacing of up to one and a half times the distance to the wall.

### Special characteristics



Outstanding uniformity



Easy installation



Wide luminaire spacing with wallwashing



ERCO high-power LEDs



Efficient Spherolit technology



Different light colors



Excellent thermal management



EMC-optimized



Various housing colors




Various construction sizes



Trailing edge dimmable + On-board Dim


## Pantrac for 2-circuit track – Luminaire arrangement

### Lens wallwashers Wallwash

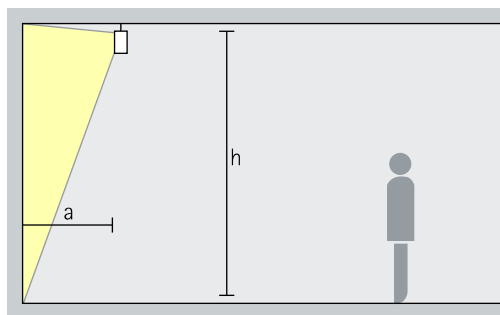

For uniform vertical illuminance, the distance (a) of Pantrac lens wallwashers from the wall should be around one third of the room height (h). The luminaire head has been adjusted precisely for optimum wallwashing.

Arrangement:  $a = 1/3 \times h$

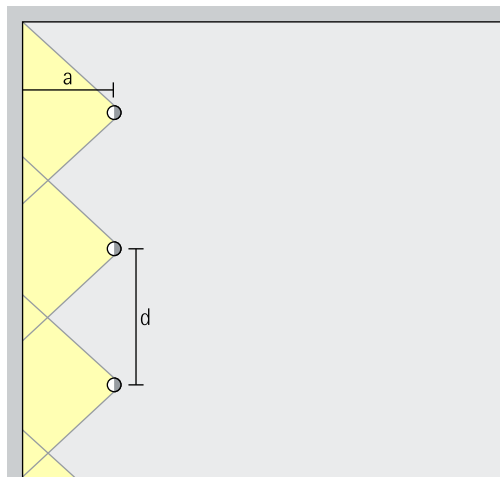

For good longitudinal uniformity, the spacing (d) of Pantrac lens wallwashers may be up to 1.5 times the offset from the wall (a).

Arrangement:  $d \leq 1.5 \times a$


The optimal wall offset and luminaire spacing for each product are indicated in the wallwasher tables in the catalogue and the product data sheets.

Karavaevi Brothers  
Cafe – Bolshoy  
Levshinskiy  
Pereulok. Architec-  
ture and lighting  
design: V12 Archi-  
tects / Vvgeniy  
Shchetinkin,  
Lleeza Semionova,  
Moscow.



Pantrac for 2-circuit track

Construction size 4 3/4"



LED module  
Maximum value  
at 4000K CRI 92

|              |
|--------------|
| 12.1W/1723lm |
|--------------|

Light color

|  |              |  |              |
|--|--------------|--|--------------|
|  | 2700K CRI 92 |  | 3500K CRI 92 |
|  | 3000K CRI 92 |  | 4000K CRI 92 |
|  | 3000K CRI 97 |  |              |

Light  
distribution

|  |                  |
|--|------------------|
|  | Lens wallwashers |
|  | Wallwash         |


Control

|  |                                             |
|--|---------------------------------------------|
|  | Trailing edge<br>dimmable +<br>On-board Dim |
|--|---------------------------------------------|

Color (housing)

|  |       |  |                 |
|--|-------|--|-----------------|
|  | White |  | 10,000 colors * |
|  | Black |  |                 |

Construction size 8 3/16"



|              |
|--------------|
| 24.3W/3446lm |
|--------------|

|  |              |  |              |
|--|--------------|--|--------------|
|  | 2700K CRI 92 |  | 3500K CRI 92 |
|  | 3000K CRI 92 |  | 4000K CRI 92 |
|  | 3000K CRI 97 |  |              |

|  |                  |
|--|------------------|
|  | Lens wallwashers |
|  | Wallwash         |

|  |                                             |
|--|---------------------------------------------|
|  | Trailing edge<br>dimmable +<br>On-board Dim |
|--|---------------------------------------------|

|  |       |  |                 |
|--|-------|--|-----------------|
|  | White |  | 10,000 colors * |
|  | Black |  |                 |

\* available on request

[www.erco.com/pantrac](http://www.erco.com/pantrac)





Arup, Sydney.  
Lighting design:  
Arup. Photography:  
Jackie Chan,  
Sydney.